

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : E21B 43/10, 17/10, 23/04	A2	(11) International Publication Number: WO 97/20130 (43) International Publication Date: 5 June 1997 (05.06.97)
<p>(21) International Application Number: PCT/GB96/02903</p> <p>(22) International Filing Date: 25 November 1996 (25.11.96)</p> <p>(30) Priority Data: 9524109.7 24 November 1995 (24.11.95) GB</p> <p>(71) Applicant (for all designated States except US): PETROLINE WIRELINE SERVICES LIMITED [GB/GB]; Offshore Technology Park, Claymore Drive, Bridge of Don, Aberdeen AB23 8GD (GB).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): CAMPBELL, Alasdair [GB/GB]; 38 Bruce Crescent, Ellon AB41 9BW (GB). METCALFE, Paul, David [GB/GB]; North Wing, Bucklerburn Steading, Peterculter AB14 0NP (GB). SCOTT, Brian [GB/GB]; Petroline Wireline Services Limited, Offshore Technology Park, Claymore Drive, Bridge of Don, Aberdeen AB23 8GD (GB).</p> <p>(74) Agents: McCALLUM, William, Potter et al.; Cruikshank &amp; Fairweather, 19 Royal Exchange Square, Glasgow G1 3AE (GB).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG)</p> <p>Published Without international search report and to be republished upon receipt of that report.</p>	

(54) Title: DOWNHOLE APPARATUS AND METHOD FOR EXPANDING A TUBING

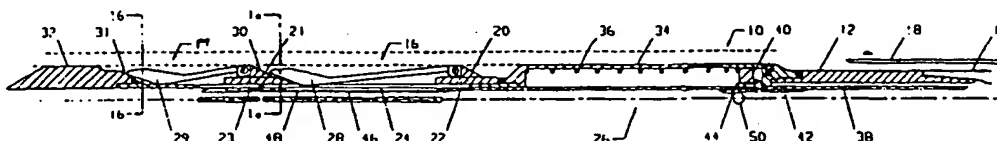

(57) Abstract

Downhole apparatus is disclosed for use in expanding liner or tubing. The apparatus (10) comprises a body (12) for connection to a string (14) and an expansion portion on the body, the expansion portion including a plurality of radially movable parts (16, 17) for defining an outer surface thereof. The parts (16, 17) are initially arranged in an axially and circumferentially offset first configuration (Figure 1) in which the parts may assume a smaller diameter first configuration. The apparatus (10) is then run into a borehole and through a length of expandable tubing (18). The parts (16, 17) are then moved radially outwardly and axially aligned such that the parts assume a larger diameter second configuration and define a substantially continuous outer circumference (Figure 2). The expansion portion is then pulled through the tubing to expand the tubing (18).

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## DOWNHOLE APPARATUS AND METHOD FOR EXPANDING A TUBING

This invention relates to downhole apparatus and in particular to apparatus for use in expanding liner or tubing. The invention also relates to a method of expanding tubing.

5 WO-A-93\25800 (Shell Internationale Research) describes a method of completing an uncased section of a borehole in an underground oil-bearing formation. A liner provided with overlapping longitudinal slots is fixed at a predetermined position in the borehole. A tapered  
10 expansion mandrel or cone is then moved through the liner and expands the liner to a diameter larger than the cone maximum diameter. Ideally, the liner is expanded to such an extent that it contacts the bore wall. In one application, the slotted liner supports the borehole wall  
15 while permitting oil to flow from the formation into the bore. In other applications the liner is expanded into soft cement, and after the cement has set the bore is drilled out to the diameter of the expanded liner.

The liner may be run into the borehole with the cone  
20 already positioned at the liner upper or lower end, or the cone may be run in after the liner is fixed in the borehole. The latter operation requires provision of a cone with a smaller diameter configuration such that the cone may be passed through the bore casing and then  
25 expanded to a larger diameter configuration before being pulled or pushed through the liner. WO-A-93 25800

discloses one form of expandable cone, however the disclosed arrangement produces an expanded cone with a non-continuous circumference, resulting in non-circular expanded liner. This reduces the effective diameter and surface area of the liner, and results in the liner being spaced from the bore wall at a number of locations around the liner circumference; all of these features of the liner tend to reduce its effectiveness in terms of formation control and subsequent management.

It is among the objects of embodiments of the present invention to provide an expansion mandrel or cone which may assume a smaller diameter first configuration to allow running in through an unexpanded liner but which, in a second configuration, will maintain a larger diameter for expanding liner to a substantially circular form.

According to the present invention there is provided downhole apparatus for use in expanding tubing, the apparatus comprising a body for connection to a string and an expansion portion on the body which may be arranged to define a smaller diameter first configuration for running in and a larger diameter second configuration for expanding the tubing, the expansion portion including a plurality of radially movable parts for defining an outer surface thereof and which parts are axially and circumferentially offset for movement between the first and second configurations, and are axially alignable in the second configuration to define a substantially continuous outer circumference.

According to another aspect of the present invention there is provided a method of expanding tubing, the method comprising the steps of:

5 providing apparatus comprising a body for connection to a string and an expansion portion on the body, the expansion portion including a plurality of radially movable parts for defining an outer surface thereof;

10 arranging the parts in an axially offset first configuration in which the parts may assume a smaller diameter first configuration;

mounting the apparatus on a string;

running the apparatus into a borehole and through a length of expandable tubing;

circumferentially offsetting the parts;

15 moving the parts radially outwardly and axially aligning the parts whereby the parts assume a larger diameter second configuration to define a substantially continuous outer circumference; and then

20 pulling the expansion portion through the tubing to expand the tubing.

25 The present invention thus avoids the disadvantages of existing proposals, in which the expansion mandrel or cone is made up of solely radially movable parts; to allow the parts to assume a smaller diameter configuration the parts must be circumferentially spaced when in the larger diameter configuration. In the present invention the ability to axially offset the parts obviates the need for such spacing.

Preferably, two sets of expansion portion parts are provided, each set comprising a plurality of circumferentially aligned parts with spaces therebetween to accommodate the other parts when each set is in the larger diameter second configuration. The parts may be configured to allow one set of parts to be radially extended to the second configuration and the sets then axially aligned before the other set is extended.

Preferably also, the apparatus includes means for moving the parts between the first and second configurations. The moving means may utilise mechanical forces transferred through the string but preferably utilise fluid pressure forces created by fluid pumped into or through the string and body. Thus, the body preferably defines a bore including a restriction to permit creation of a pressure force which may be utilised to drive a piston arrangement linked to the parts.

Preferably also, the apparatus includes means for retracting the parts from the second configuration to the first configuration. Most preferably, the retracting means is in the form of a biasing arrangement, conveniently a spring. Alternatively, the retracting means may be fluid pressure actuated and in such an apparatus fluid pressure may also be utilised to actuate means for moving the parts from the first to the second configuration. In one such apparatus valve means is provided to allow a fluid pressure force to move the parts in one direction from the first to the second configuration and then in the opposite direction

from the second to the first configuration. The valve means may be actuated by, for example, application of an over-pressure to move a valve member from a first configuration to a second configuration. Such a valve  
5 means may be provided in conjunction with retracting means including a biasing arrangement, for use in the event of failure of the biasing arrangement.

The parts may take various forms including: pivotally mounted or flexible fingers, the free ends of which may be  
10 extended by axial movement of the fingers relative to appropriate cam surfaces; or radially moveable keys, which may be extended by axial movement of the keys relative to appropriate cam surfaces. Where the parts are in the form of flexible fingers, the parts may normally define a larger  
15 diameter in the first configuration, but be inwardly deflectable to the smaller diameter; in the second configuration the fingers are supported such that they are not deflectable.

According to a further aspect of the present invention  
20 there is provided downhole apparatus comprising a body for connection to a supporting string and a portion on the body which may be arranged to define a smaller diameter first configuration and a larger diameter second configuration, said portion including a plurality of radially movable  
25 parts which are axially and circumferentially offset in the first configuration, and are axially aligned in the second configuration.

According to a still further aspect of the present

invention there is provided fluid pressure actuated downhole apparatus including: a body defining a bore; an annular actuating piston movable in the bore; and a valve piston movable relative to the actuating piston by application of bore fluid pressure, in a first position the valve piston permitting fluid pressure in the bore to be communicated to one side of the actuating piston and in a second position the valve piston permitting fluid pressure in the bore to be communicated to the other side of the actuating piston.

These and other aspects of the invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a sectional view of one half of downhole apparatus for use in expanding slotted tubing in accordance with a first embodiment of the present invention, the apparatus being shown in a first configuration;

Figures 1a and 1b are sectional views on lines 1a - 1a and 1b - 1b of Figure 1;

Figure 2 corresponds to Figure 1, but shows the apparatus in a second configuration;

Figure 2a is an end view of Figure 2;

Figure 3 corresponds to Figure 2, but shows the apparatus ready for movement from the second configuration to the first configuration under the influence of fluid pressure;

Figure 4 corresponds to Figure 3, but shows the apparatus after having been returned to the first



configuration under the influence of fluid pressure;

Figure 5 is a sectional view of downhole apparatus in accordance with a second embodiment of the present invention, the apparatus being shown in a first configuration;

Figure 5a is a development of a portion of the apparatus of Figure 5;

Figure 6 corresponds to Figure 5, but shows the apparatus in a second configuration;

Figure 6a is a development of a portion of the apparatus of Figure 6;

Figure 7 is a sectional view of downhole apparatus in accordance with a third embodiment of the present invention, showing the apparatus in a first configuration;

Figure 7a is a sectional view on line 7a - 7a of Figure 7;

Figure 7b is a sectional view, corresponding to a view taken on line 7b - 7b of Figure 7 as the apparatus is passed through a restriction, and showing the apparatus in a first configuration;

Figure 8 corresponds to Figure 7, but shows the apparatus in a second configuration;

Figure 8a is a sectional view on line 8a - 8a of Figure 8;

Figure 9 is a sectional view of one half of an actuating arrangement in accordance with an aspect of the invention, the arrangement being shown in a first configuration;

Figure 10 is a view corresponding to Figure 10, and showing the actuating arrangement in an intermediate configuration; and

Figure 11 is a view corresponding to Figure 9, and showing the actuating arrangement in a second configuration.

Reference is first made to Figure 1 of the drawings, which illustrates downhole apparatus 10 for use in expanding slotted tubing in accordance with a first embodiment of the present invention. The apparatus comprises a tubular body 12 which is connected to the lower end of a drillstring 14 and carries an expansion portion including first and second sets 16, 17 of pivoting cone-forming fingers. In a first configuration, as illustrated in Figure 1, the fingers 16, 17 define a diameter smaller than that of the slotted tubing 18 which the apparatus will be used to expand, such that the apparatus 10 may be run in through the tubing 18. As will be described, the fingers 16, 17 may thereafter be moved to a larger diameter second configuration (Figure 2) such that the apparatus 10 may be pulled upwardly through the tubing 18 to expand the tubing into contact with the bore wall.

Each set of fingers 16, 17 is mounted on a respective trolley or carriage 20, 21 which is axially movable relative to the body 12, each carriage including load transfer keys 22, 23 extending through respective slots 24 in the body 12 and engaging a respective part of an actuating arrangement 26, further details of which will be

described. In this example, each set 16, 17 includes three fingers, and each set is offset 60° from the other. Figures 1a and 1b of the drawings illustrate the finger free ends 28, 29 in the smaller diameter first configuration.

The upper face of each second carriage 21 defines a ramp 30 such that when the first set of fingers 16 is moved downwardly relative to the carriage 21, the free ends of the fingers 28 ride up the ramp 30 to assume the larger diameter configuration. A similar effect is achieved for the second set of fingers 17 by a ramp 31 defined by an enlarged lower body end portion 32.

The upper end of the body 12 defines a spring chamber 34 accommodating a coil spring 36 which normally biases the actuating arrangement 26 to a position in which the fingers 16, 17 are in the first configuration. The actuating arrangement 26 includes an inner sleeve 38, the upper end of which carries a collar 40 extending into the spring chamber 34, and which carries on its inner surface a sleeve 42 defining a restriction 44. The lower end of the inner sleeve 38 is connected to the carriage 20 via the load transfer keys 22 and also provides mounting for spring fingers 46 which protect a sleeve 48 linked to the second carriage 21 by the keys 23.

To move the fingers 16, 17 from the first configuration to the second configuration, a ball 50 is pumped down the drill string 14 from the surface and engages the restriction 44 effectively sealing the lower

end of the string. Pumping down on the ball 50, in this example to a pressure of 77.3 kg/cm<sup>2</sup> (1100 psi), creates a pressure force which drives the actuating arrangement 26 downwardly. As the actuating arrangement begins to move the first carriage 20 is moved downwardly on the body 12, however the second carriage 21 does not move immediately. Thus, the first set of fingers 16 ride up onto the carriage 21 to assume the larger diameter second configuration. Continued movement of the actuating arrangement 26 brings the lower end of the first carriage 20 into contact with the upper end of the second carriage 21, and thus pushes the second carriage 21 downwardly such that the second set of fingers 17 ride up onto the body end portion 32. As will be noted from Figures 1a, 1b and 2a, the edges of the sets of fingers 16, 17 are configured such that the second set of fingers 17 may be expanded radially outwardly between the previously expanded first set of fingers 16.

With the fingers 16, 17 in the larger diameter second configuration, the apparatus 10 is lifted on the drill string through the tubing 18, forcing the tubing 18 to expand into contact with the bore wall. As is evident from Figure 2a, the configuration of the free ends of the fingers is such that the expanded fingers define a substantially continuous circumference, such that the expanded tubing has a circular form.

In normal operation, following the expansion of the tubing 18, bleeding-off of pressure above the ball 50 will allow the spring 36 to lift the actuating arrangement 26 to

retract the fingers 16, 17 to the smaller diameter first configuration, such that the apparatus 10 may be retrieved from the bore hole. However, if the spring 36 should fail, or a part of the apparatus 10 has been damaged or jams such that the spring 36 does not produce sufficient force to return the fingers 16, 17 to the first configuration, fluid pressure may be utilised to lift the fingers, as will now be described. As noted above, the restriction 44 which engages the ball 50 is defined by a sleeve 42 mounted on the inner sleeve 38. The sleeve 42 is held in place by shear pins 52 such that by application of an overpressure, in this example around  $280 \text{ kg/cm}^2$  (4000 psi), the pins 52 will shear allowing the ball 50 and sleeve 42 to move downwardly to abut a shoulder 54 on the inner surface of the sleeve 38, as shown in Figure 3. This movement brings a shear pin port 56 on the sleeve 42 into alignment with a shear pin port 58 in the sleeve 38. Thus, the fluid pressure from the string and apparatus bore can now be communicated into the spring chamber 34, below the collar 40. This drives the collar 40, and the rest of the actuating arrangement 26, upwardly such that the fingers 16, 17 are returned to the smaller diameter first configuration. To accommodate the displacement of fluid from the portion of the spring chamber 34 upwardly of the collar 40 a burst disc 60 is ruptured to allow fluid to flow from the chamber 34 into the bore hole annulus.

Reference is now made to Figures 5 and 6 of the drawings, which illustrate downhole apparatus 70 for use in

expanding slotted tubing in accordance with a second embodiment of the present invention. It should be noted that in these drawings the "upper" end of the apparatus 70 is located to the left hand side of the drawings. The apparatus 70 comprises a tubular body 72 for connection to the lower end of a drill string (not shown) and defining two sets of windows 74, 75 accommodating respective sets of keys 76, 77. An axially movable sleeve 78 is mounted within the body 72 and is biased towards a first position by a coil spring 80 which acts between the sleeve 78 and the body 72. The sleeve 78 defines an annular surface 82 and with the sleeve in its first position the surface 82 supports the keys 76, 77 in a smaller diameter first configuration, in which the apparatus 70 may be run through a length of slotted tubing 84. The sleeve 78 also defines a second surface 86 on which the keys 76, 77 may be supported in a larger diameter second configuration, as shown in Figure 6 of the drawings.

The lower end of the body 72 includes a collar 88 defining a bore restriction which restricts downward movement of a ball 90 located within the bore. Thus, while running in, the ball 90 may be lifted from the collar 88 allowing well fluid to flow into the apparatus 70 and drill string. However, on pumping down through the drill string and apparatus 70, the ball 90 is pushed against the collar 88 to seal the bore such that the pressure within the bore rises. The sleeve 78 is configured such that a positive pressure differential between the body bore and the

borehole annulus will tend to drive the sleeve 78 upwardly and thus move the keys 76, 77 from the first configuration to the second configuration, as will be described.

Each set of keys consists of three keys, and each set  
5 is circumferentially offset relative to the other by 60°. In the first configuration the keys 76, 77 are also axially offset, as may be seen in Figure 5. Accordingly, the windows 74, 75 are also circumferentially and axially offset, as may be seen in Figures 5a of the drawings.

10 Upward movement of the sleeve 88 relative to the body 72 first lifts the first set of keys 76 radially outwardly as a ramp portion 92 between the surfaces 82, 86 engages the inner lower face of the keys 76. Initially, axial  
15 movement of the keys 76 is prevented by the window upper walls 94. However, as the keys 76 are moved outwardly each window wall 94 is brought into alignment with an axial slot 96 in the respective key, which allows the keys 76 to be moved into axial alignment with the second keys 77 on the  
20 ramp 98 at the lower end of the second surface 86 engaging the inner lower face of the keys 76. The second set of keys 77 is moved outwardly by the ramp 92 coming into contact with the inner lower face of the keys 77. Thus, at the end of the stroke of the sleeve 78, the keys 76, 77 are axially and circumferentially aligned, as illustrated in  
25 Figure 6a, to define the larger second diameter, ready to be pulled through the tubing.

The keys 76, 77 are returned to the smaller diameter second configuration by bleeding off pressure from the

bore, such that the spring 80 returns the sleeve 78 to its initial position. Attempting to pull through a restriction after pressure is bled off will cause the keys to collapse inwardly should the spring fail.

5           Reference is now made to Figures 7 and 8 of the drawings, which illustrate downhole apparatus 150 for use in expanding tubing in accordance with a third embodiment of the present invention. The apparatus 150 includes a tubular body 152 for connection to a drill string 154.

10          Mounted to the lower end of the body 152 is a spring finger mounting assembly 156 from which three spring fingers 158 with enlarged free ends 160 extend axially downwards. The assembly 156 also defines an outer face of a spring and piston chamber 162, the inner face of the chamber 162 being

15          defined by a piston and cam assembly 164 which is axially movable relative the spring finger mounting assembly 156. The assembly 164 includes a sleeve 166 carrying a piston 168 extending into the chamber 162, with a spring 170 abutting an upper face of the piston 168 and tending to

20          move the assembly 164 downwardly relative to the assembly 156. Fluid ports 172 extend through the sleeve 166 to provide fluid communication between the apparatus bore 174 and the chamber 162, on the opposite side of the piston 168 from the spring 170.

25           The assembly 164 also defines a cam portion 176 which, with the apparatus 150 in a first configuration, is spaced downwardly from the finger free ends 160, such that the ends 160 may be deflected inwardly as the apparatus 150 is



run into a bore hole (see Figure 7b).

The lower portion of the apparatus 150 is a mirror image of the upper portion, though the lower set of spring fingers 178 are offset by 60° to the upper fingers 158. Further, a lower body portion 180 mounted on the lower end of the piston and cam assembly 164 defines a restriction 184 in the bore 174.

For running in, the springs 170 tend to extend the apparatus 150 axially such that the spring finger free ends 160 are spaced from the cam portion 176, allowing the fingers to be deflected inwardly as the apparatus 150 is run in and is run through borehole restrictions such as the length of slotted tubing 186 which is to be expanded. After passing through the tubing 186, fluid is pumped through the string and the apparatus bore 174, and the restriction 184, to create a pressure differential across the sleeve 166. This results in the pistons 168 being moved in the spring and piston chambers 162 to compress the springs 170 and to move the spring finger free ends 160 onto the cam portion 176 (Figure 8). With the fingers in this second configuration, the apparatus 150 may be lifted through the tubing 186 to expand the tubing, as illustrated in Figure 8.

Once the tubing 186 has been extended, pressure is bled off from the bore 174 such that the springs 170 return the fingers 158 to the first configuration.

Reference is now made to Figures 9, 10 and 11 of the drawings, which illustrate details of an actuating

arrangement 190 suitable for use with apparatus as described above. In particular, the actuating arrangement 190 is primarily intended for use with a modified form of the apparatus 10.

5           The arrangement is provided within a tubular body 192 and includes an annular actuating piston 194, comprising a number of parts 194a-d, linked to an actuating rod 196 which transfers movement of the piston to the trolleys (not shown) on which the cone-forming fingers are mounted. A  
10       valve piston 198 is mounted within the actuating piston 194 and controls the movement of the actuating piston 194, and thus the formation of the expanding cone, as will be described. The valve piston 198 comprises a piston reverse sleeve 200 and a pressure retention sleeve 202, the sleeves  
15       200, 202 being linked by a shear pin 204. The pressure retention sleeve 202 is linked to the actuating piston part 194b by a further shear pin 206, and a ratchet 208 is provided between the sleeve 202 and part 194c, the purpose of which will be described.

20           Seals are provided between the piston 194 and the body 192 at two locations 210, 211. With the valve piston 198 in a first configuration, as illustrated in Figure 1, pressure from the surface (from the left hand side in the Figures) acts downwardly and creates a differential  
25       pressure acting over the area between the seals 210, 211, to move the piston 194 downwardly to form the expanding cone. The fluid pressure is communicated from the body bore to the piston 194 via ports 212, 213, 214 in the

piston reverse sleeve 200, the pressure retention sleeve 202 and the actuating piston part 194c, respectively.

Once the cone has been formed, application of a first overpressure, for example  $10 \times 10^6$  Pa (1500psi), shears the pin 206 and permits movement of the valve piston 198, relative to the actuating piston 194, to an intermediate position (Figure 10) in which the port 214 is closed by the pressure retention sleeve 202. If the pump at the surface providing the actuating pressure is then shut off, the piston 194 will remain in its downward position, and the cone remain formed, as the sleeve 202 is held in the intermediate position by the ratchet 208 and traps the pressurised fluid behind the piston 194.

To retract the piston, and retract the cone-forming fingers to allow removal of the apparatus from the borehole, a further overpressure, for example  $33 \times 10^6$  Pa (5000psi) is applied, which shears the pin 204, allowing separation of the sleeves 200, 202 and opening another port 216 in the actuating piston part 194c. This permits the high pressure bore fluid to act on the reverse area or underside of the piston 194 and push the piston upwards. The fluid trapped between the seals 210, 211 escapes into the borehole annulus via a  $33 \times 10^6$  Pa (5000psi) burst disc 218, which defines a small area port 220 to provide controlled movement of the piston 194.

It will be apparent to those of skill in the art that the above-described embodiments are merely exemplary of the present invention, and that various modifications and

improvements may be made thereto, without departing from the scope of the invention, for example the number of cone-forming fingers may be varied. The above embodiments are described as being mounted on drill pipe, though of course  
5 the apparatus may be mounted on any suitable supporting member or string, including coil tubing. It will also be clear that where terms such as "upper", "lower" and the like have been used, this has merely been to facilitate understanding, and the apparatus may of course be utilised  
10 in horizontal and inclined bore holes and in different orientations. Further, although the illustrated embodiments are described for use with slotted tubing, it will be clear that the apparatus of the invention may be utilised to expand other tubing forms and configurations,  
15 including sandscreens. Also, the actuating arrangement 190, although described with reference to a tubing expanding apparatus, may be utilised in any suitable fluid actuated downhole apparatus.

CLAIMS:

1. Downhole apparatus for use in expanding tubing, the apparatus comprising a body for connection to a string and an expansion portion on the body which may be arranged to  
5 define a smaller diameter first configuration for running in and a larger diameter second configuration for expanding the tubing, the expansion portion including a plurality of radially movable parts for defining an outer surface thereof and which parts are axially and circumferentially  
10 offset for movement between the first and second configurations, and are axially alignable in the second configuration to define a substantially continuous outer circumference.
2. The apparatus of claim 1, wherein at least two sets of  
15 expansion portion parts are provided, each set comprising a plurality of circumferentially aligned parts with spaces therebetween to accommodate the other parts when each set is in the larger diameter second configuration.
3. The apparatus of claim 2, wherein said parts are  
20 configurable to permit one set of parts to be radially extended and both sets then axially aligned before the other set is extended.
4. The apparatus of any of the preceding claims further comprising means for moving the parts between the first and

comprising means for moving the parts between the first and second configurations.

5. The apparatus of claim 4, wherein said moving means is mechanically actuated.

5 6. The apparatus of claim 4 or 5, wherein said moving means is fluid pressure actuated.

7. The apparatus of claim 6, wherein the body defines a bore including a restriction and a piston arrangement is provided and linked to the parts, whereby a pressure differential may be created to drive the piston and move the parts from the first configuration to the second configuration.

10

8. The apparatus of claim 7, wherein the piston arrangement includes a piston chamber and means for sealing the chamber to retain pressurised fluid therein and lock the parts in the second configuration.

15

9. The apparatus of any of the preceding claims further comprising means for retracting the parts from the second configuration to the first configuration.

20 10. The apparatus of claim 9, wherein the retracting means includes a biasing arrangement.

means is fluid pressure actuated.

12. The apparatus of claim 11, further comprising fluid pressure actuated means for moving the parts from the first to the second configuration and valve means for providing fluid communication with said moving means to move the parts in one direction from the first to the second configuration and then providing fluid communication with said retracting means to move the parts in the opposite direction from the second to the first configuration.

13. The apparatus of claim 12, wherein the valve means is a member controlling access to an actuating piston and in a first configuration permits fluid communication with one side of the piston to move the parts in one direction and in a second configuration permits fluid communication with the other side of the piston to move the parts in the opposite direction.

14. The apparatus of claim 13, wherein the valve member is movable in response to applied fluid pressure.

15. The apparatus of claim 14, wherein the actuating piston is located in a piston chamber and between the first and second configurations the valve member is movable to an intermediate configuration to seal the chamber and retain pressurised fluid therein to lock the parts in the second configuration.

16. The apparatus of any of claims 1 to 15, wherein the parts are flexible fingers having axially deflectable free ends and means is provided for supporting said free ends in the second configuration.

5 17. The apparatus of any of any of claims 1 to 15, wherein the parts are pivotally mounted fingers.

18. The apparatus of any of claims 1 to 15, wherein the parts are radially moveable keys.

10 19. The apparatus of claim 17 or 18, further comprising cam surfaces for extending the parts following axial movement of the parts relative to the cam surfaces.

20. A method of expanding tubing, the method comprising the steps of:

15 providing apparatus comprising a body for connection to a string and an expansion portion on the body, the expansion portion including a plurality of radially movable parts for defining an outer surface thereof;

20 arranging the parts in an axially offset first configuration in which the parts may assume a smaller diameter first configuration;

mounting the apparatus on a string;

running the apparatus into a borehole and through a length of expandable tubing;



circumferentially offsetting the parts;

moving the parts radially outwardly and axially aligning the parts whereby the parts assume a larger diameter second configuration to define a substantially continuous outer circumference; and then



pulling the expansion portion through the tubing to expand the tubing.




21. Downhole apparatus comprising a body for connection to a supporting string and a portion on the body which may be arranged to define a smaller diameter first configuration and a larger diameter second configuration, said portion including a plurality of radially movable parts which are axially and circumferentially offset in the first configuration, and are axially aligned in the second configuration.




22. Fluid pressure actuated downhole apparatus including: a body defining a bore; an annular actuating piston movable in the bore; and a valve piston movable relative to the actuating piston by application of bore fluid pressure, in a first position the valve piston permitting fluid pressure in the bore to be communicated to one side of the actuating piston and in a second position the valve piston permitting fluid pressure in the bore to be communicated to the other side of the actuating piston.




2/4

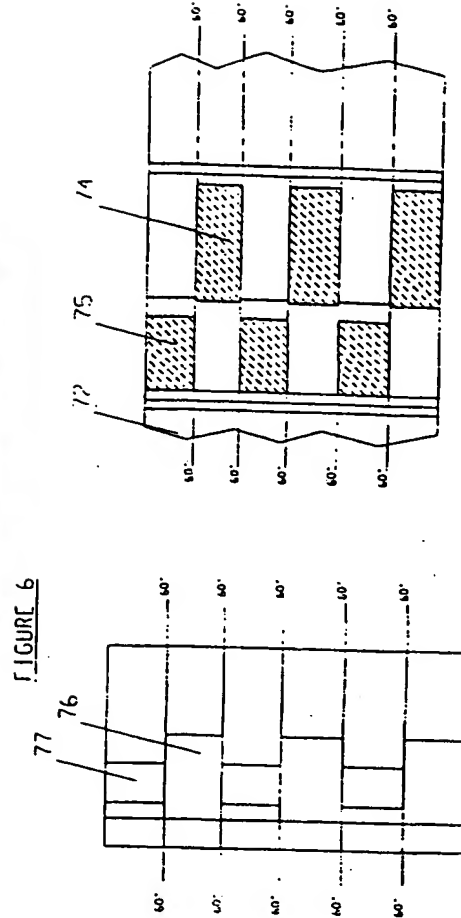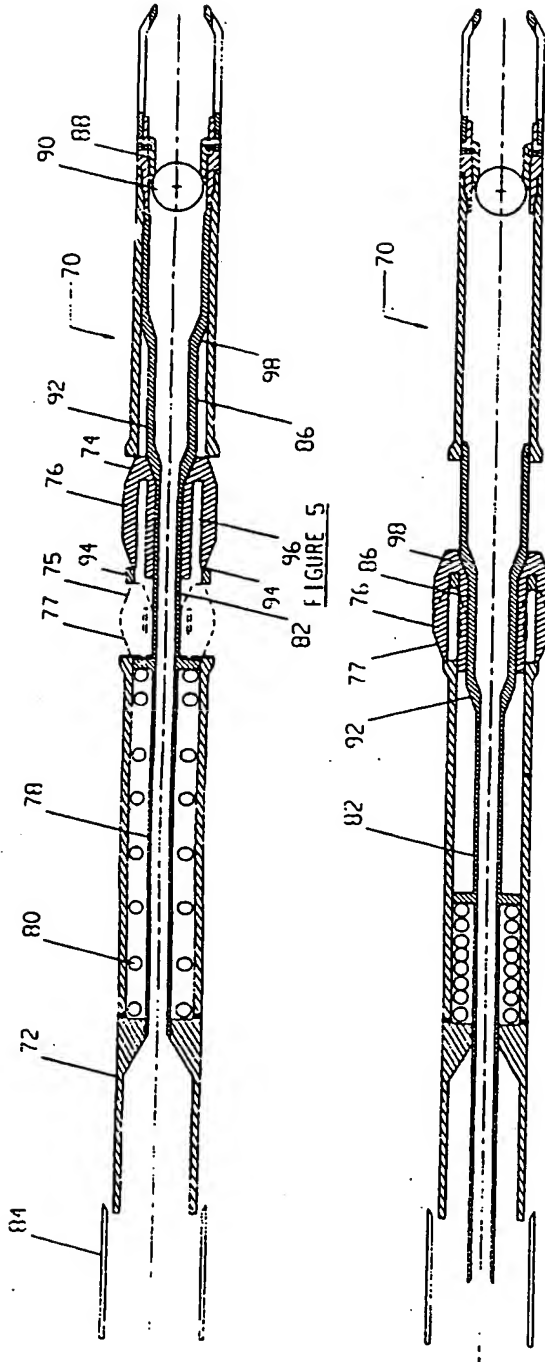

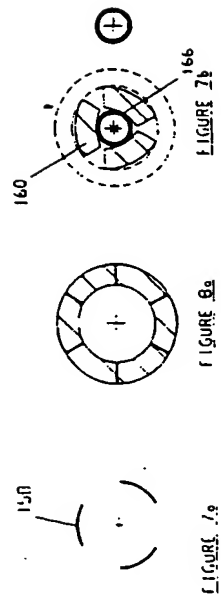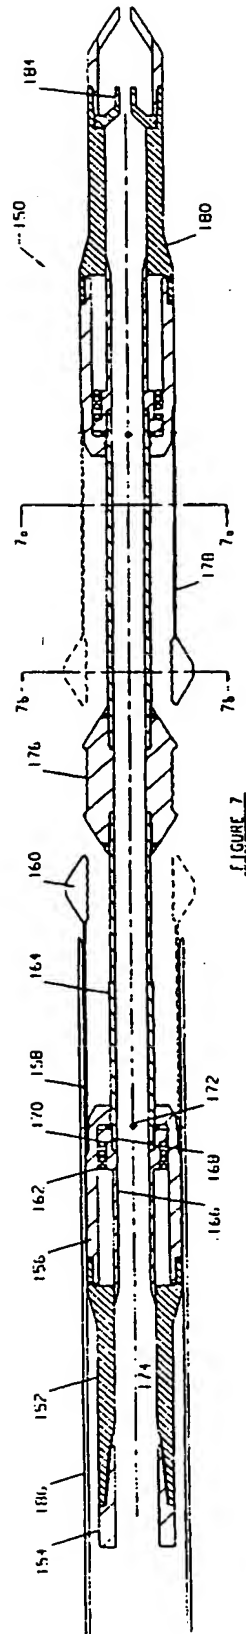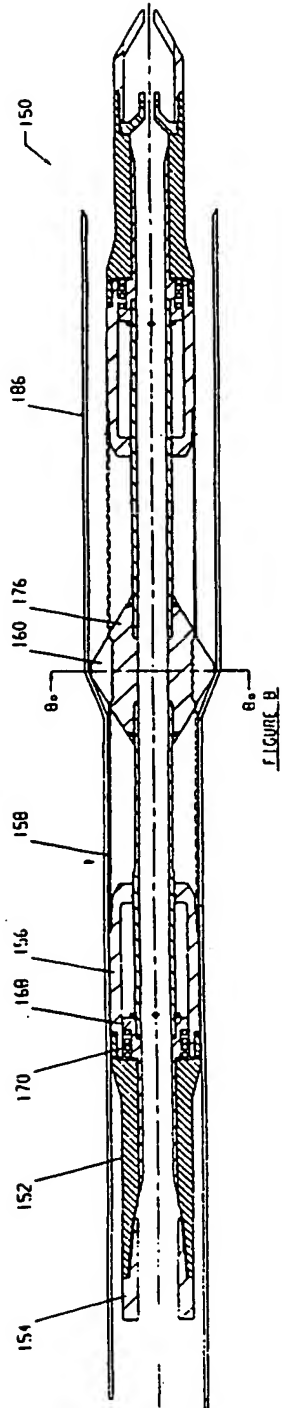

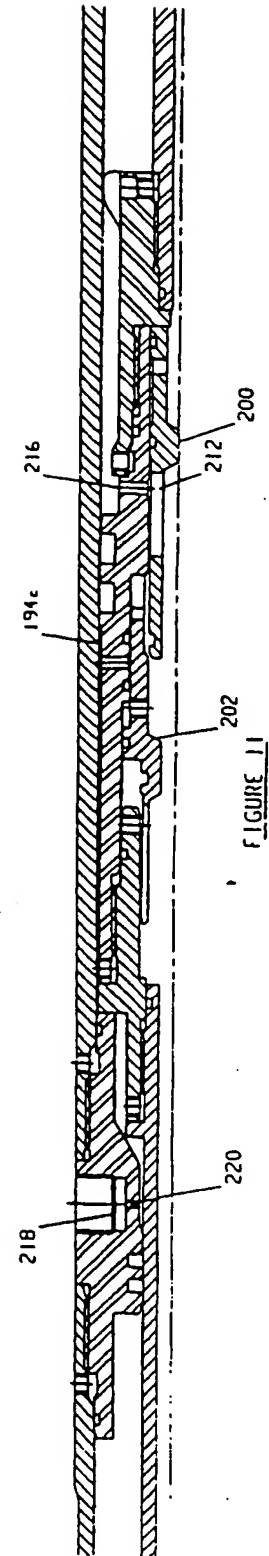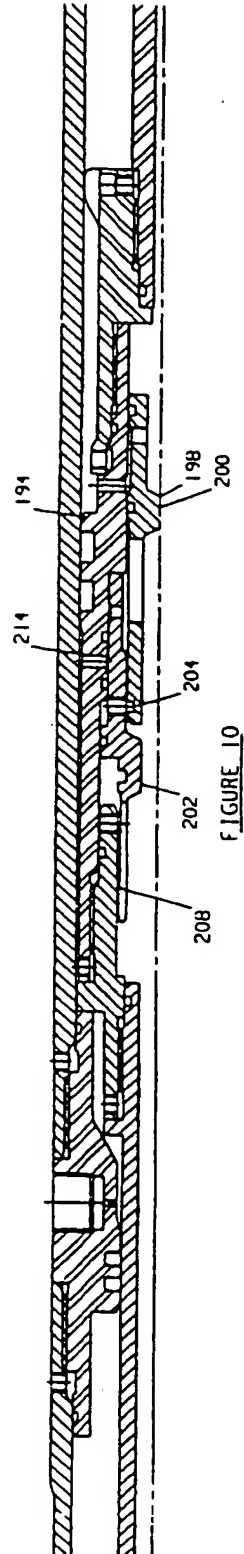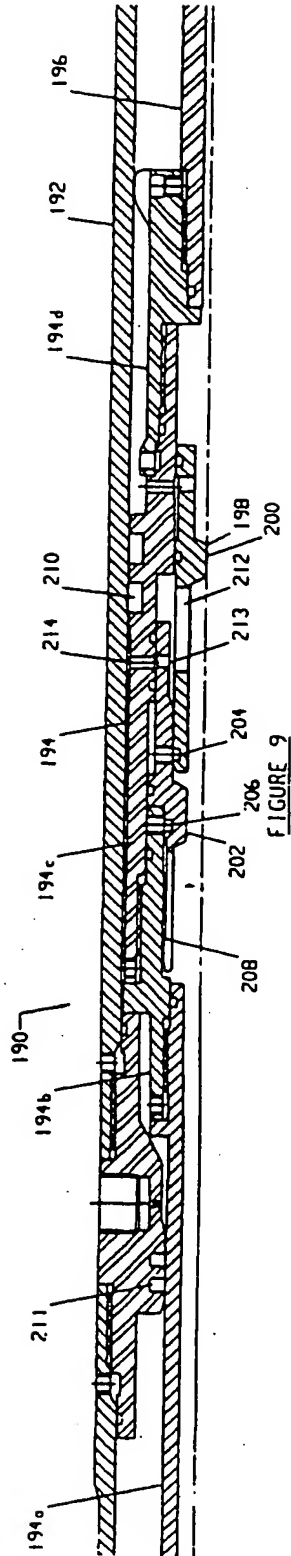



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> :

E21B 43/10, 17/10, 23/04

A3

(11) International Publication Number:

WO 97/20130

(43) International Publication Date:

5 June 1997 (05.06.97)

(21) International Application Number: PCT/GB96/02903

(22) International Filing Date: 25 November 1996 (25.11.96)

(30) Priority Data:

9524109.7

24 November 1995 (24.11.95) GB

(71) Applicant (for all designated States except US): PETROLINE WIRELINE SERVICES LIMITED [GB/GB]; Offshore Technology Park, Claymore Drive, Bridge of Don, Aberdeen AB23 8GD (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): CAMPBELL, Alasdair [GB/GB]; 38 Bruce Crescent, Ellon AB41 9BW (GB). METCALFE, Paul, David [GB/GB]; North Wing, Bucklerburn Steading, Peterculter AB14 0NP (GB). SCOTT, Brian [GB/GB]; Petroline Wireline Services Limited, Offshore Technology Park, Claymore Drive, Bridge of Don, Aberdeen AB23 8GD (GB).

(74) Agents: McCALLUM, William, Potter et al.; Cruikshank & Fairweather, 19 Royal Exchange Square, Glasgow G1 3AE (GB).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).


Published

With international search report.

(88) Date of publication of the international search report:

28 August 1997 (28.08.97)

(54) Title: DOWNHOLE APPARATUS AND METHOD FOR EXPANDING A TUBING

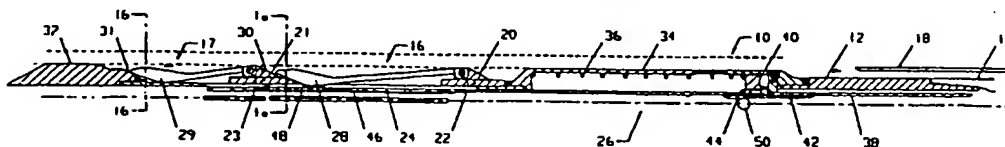

(57) Abstract

Downhole apparatus is disclosed for use in expanding liner or tubing. The apparatus (10) comprises a body (12) for connection to a string (14) and an expansion portion on the body, the expansion portion including a plurality of radially movable parts (16, 17) for defining an outer surface thereof. The parts (16, 17) are initially arranged in an axially and circumferentially offset first configuration (Figure 1) in which the parts may assume a smaller diameter first configuration. The apparatus (10) is then run into a borehole and through a length of expandable tubing (18). The parts (16, 17) are then moved radially outwardly and axially aligned such that the parts assume a larger diameter second configuration and define a substantially continuous outer circumference (Figure 2). The expansion portion is then pulled through the tubing to expand the tubing (18).

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam



# INTERNATIONAL SEARCH REPORT

Inter. Appl. No.

PCT/GB 96/02903

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 E21B43/10 E21B17/10. E21B23/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 603 411 A (LINK) 7 September 1971 see column 4, line 69 - line 71 see column 5, line 31 - line 58	21
Y	---	1-6, 9-11, 16-20
Y	WO 93 25800 A (SHELL INTERNATIONALE RESEARCH MATSCAPPIJ B.V.) 23 December 1993 cited in the application see page 6, line 1 - line 7	1-6, 9-11, 16-20
Y	US 5 197 553 A (LETURNO) 30 March 1993 see column 4, line 29 - line 43 ---	6, 11
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- \*&\* document member of the same patent family

Date of the actual completion of the international search

27 March 1997

Date of mailing of the international search report

25.06.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

SOGNO M.G.

# INTERNATIONAL SEARCH REPORT

Intern. nat. Application No

PCT/GB 96/02903

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	FR 2 372 955 A (TOURBA) 30 June 1978 see page 1, line 40 - page 3, line 9	21 1-5,9, 10,16-20
X A	--- US 3 437 159 A (LINK) 8 April 1969 see column 4, line 20 - line 59	1 1-5,9, 10,16-20
A	--- US 3 191 677 A (KINLEY) 29 June 1965 see column 3, line 45 - line 60	1,20,21
A	--- WO 90 00216 A (NOCO AS) 11 January 1990 see page 4, line 28 - line 34	1,6,11, 20,21
A	--- US 3 489 220 A (KINLEY) 13 January 1970 see column 5, line 39 - line 50	1,20,21
A	--- US 3 746 092 A (LAND) 17 July 1973 see abstract	1,20,21
A	--- WO 87 07322 A (YARNELL) 3 December 1987 see abstract -----	1,20,21

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/GB 96/ 02903

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. claims 1-21
2. claim 22

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No  
PCT/GB 96/02903

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3603411 A	07-09-71	CA 929154 A	26-06-73
		DE 2101969 A	22-07-71
		FR 2077201 A	22-10-71
		GB 1271339 A	19-04-72
		ZA 7007142 A	28-07-71
-----			
WO 9325800 A	23-12-93	AU 672008 B	19-09-96
		AU 4324593 A	04-01-94
		CA 2137565 A	23-12-93
		DE 69305852 D	12-12-96
		DE 69305852 T	22-05-97
		EP 0643795 A	22-03-95
		JP 7507611 T	24-08-95
		NO 944746 A	03-02-95
		NZ 253125 A	27-02-96
		US 5366012 A	22-11-94
-----			
US 5197553 A	30-03-93	US 5271472 A	21-12-93
-----			
FR 2372955 A	30-06-78	NONE	
-----			
US 3437159 A	08-04-69	NONE	
-----			
US 3191677 A	29-06-65	NONE	
-----			
WO 9000216 A	11-01-90	AU 3838689 A	23-01-90
		US 5111893 A	12-05-92
-----			
US 3489220 A	13-01-70	NONE	
-----			
US 3746092 A	17-07-73	NONE	
-----			
WO 8707322 A	03-12-87	AU 610827 B	30-05-91
		AU 7392487 A	22-12-87
		CA 1293207 A	17-12-91
		DE 3776686 A	26-03-92
		DK 170653 B	20-11-95
		EP 0269653 A	08-06-88
		GB 2191558 A,B	16-12-87
		HK 87995 A	09-06-95

**Information on patent family members**

PCT/GB 96/02903

Form PCT/ISA/210 (patent family annex) (July 1992)

THIS PAGE BLANK (USPTO)